



DULCE HOGAR
BY ADHSA GROUP

ALFOMBRA MODULAR

Productos en Stock

CONTENIDO

ALPHA II

AMBITIONS

CRYSTAL

ELIVENED

ESSENTIAL

COBALT CREATIONS



ALPHA II



COMPOSICIÓN:
100% NYLON

CONTIENE POR CAJA:

- 20 PZAS. 0.50 X 0.50 m.
- 5 m2 POR CAJA
- 18 onzas




340



342



350

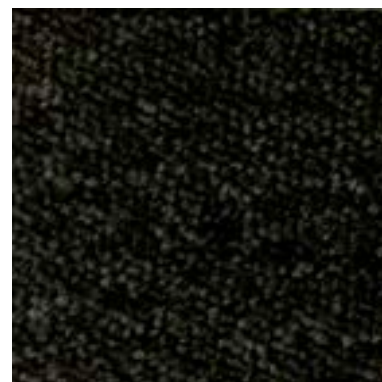

351




360



380



823

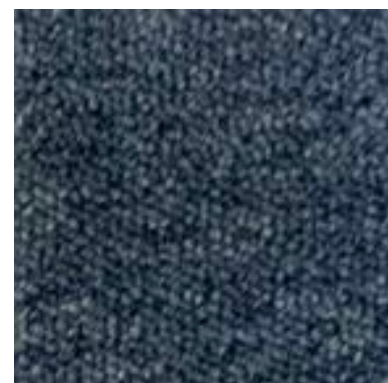

861

AMBITIONS



83




42



51



77

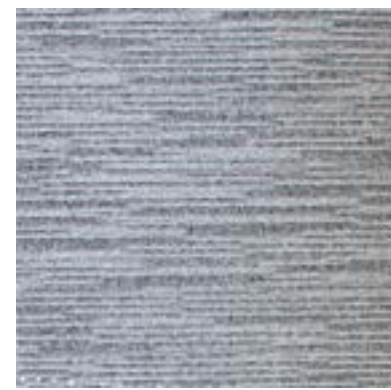

78



120

AMBITIONS



Especificaciones Ambición gráfica

Calibre de mechones 1/10 pila de bucle

composición de pila 100% PA SDN

Respaldo secundario Betún

Ancho 50x50cm

Peso de la pila 785gr/m²



Desplace la tabla horizontalmente si no está completamente visible.



CRYSTAL



185

COMPOSICIÓN:
100% PP STAINSAFE

CONTIENE POR CAJA:
- 20 PZAS. 0.50 X 0.50 m.
- 5 m2 POR CAJA
- 18 onzas

Mineral Collection



185



685



945



965

ELIVENED



569



958



959



989

ELIVENED



Enlivened

Collection	Art Exposure
Style Name	Enlivened
Style Number	BT455
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi-Directional

Feature	Description
Overall Thickness	.196" (4.98 mm)
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand®SD Nylon
Dye Method	Solution Dyed
Installation Methods	Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi-Directional
Stitches per Inch	12 (47.24 per 10cm)
Density	6580
Tufted Pile Weight	17.00 oz/yd2 (576 g/m2)
Surface Texture	

Textured Patterned Multi-Colored Loop

Recommended Installation Methods



Brick Ashlar



Brick Ashlar



Brick Ashlar



Monolithic



Multi-Directional



Quarter Turn



Vertical Ashlar

ESSENTIAL



41



72



78

ESSENTIAL



Specificaties Graphic-Essential

Deling 1/10 loop pile

Poolsamenstelling 100% PA SDN


Rug Bitumen

Breedte 50 x 50 cm

Poolgewicht 650 gr/m²



Scroll de tabel horizontaal indien niet volledig zichtbaar.

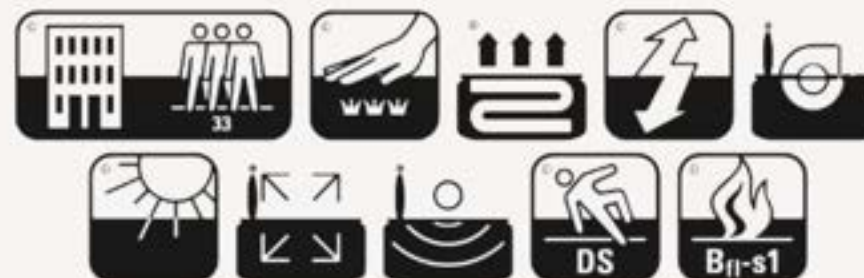

CERTIFICATEN




COBALT CREATIONS



Style: structured loop pile
Pile composition: nylon (polyamide)
Pile height: 3.0 mm
Classification: class 33 (intensive use)
Pile weight: 550 g/m²
Fire resistance: Bfl-S1



4038

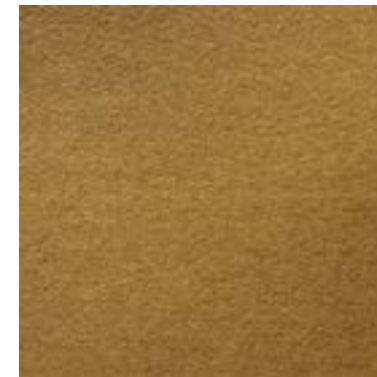


4049



4063



4070

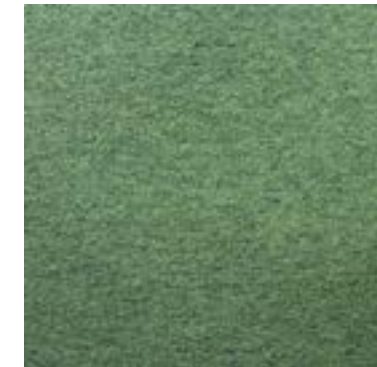

4073

COBALT CREATIONS



Style: structured loop pile
Pile composition: nylon (polyamide)
Pile height: 3.0 mm
Classification: class 33 (intensive use)
Pile weight: 550 g/m²
Fire resistance: Bfl-S1




4060




4238



4250

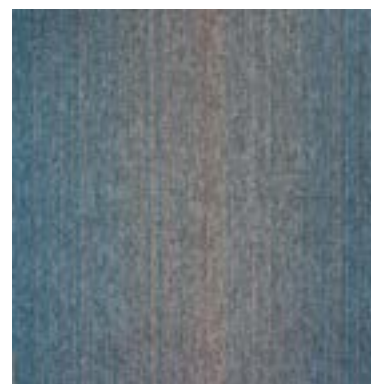

4263

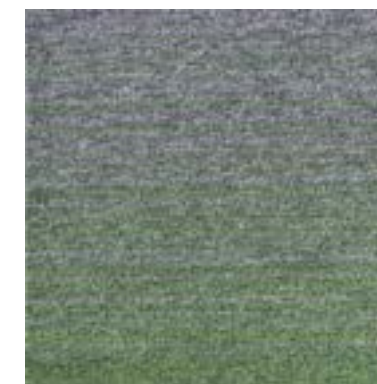

4273




4280

COBALT CREATIONS



4238

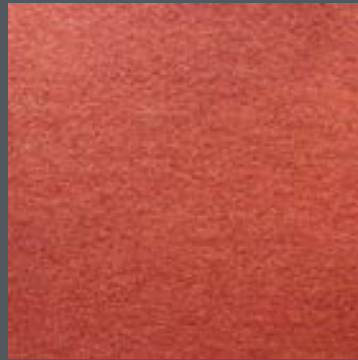

4038



4250



ALPHA II -342





4260



LARGO II - 390

OPCIONES DE INSTALACION

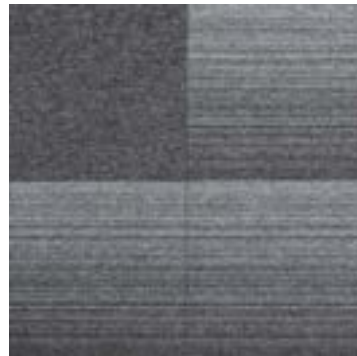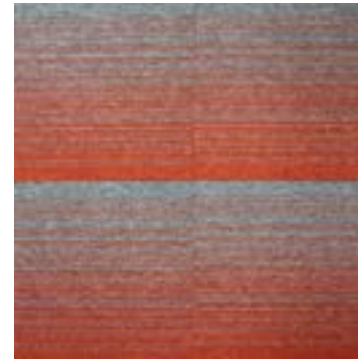

COBALT CREATIONS



4263



4063



4273



4073






4280



ALPHA II -340

OPCIONES DE INSTALACION

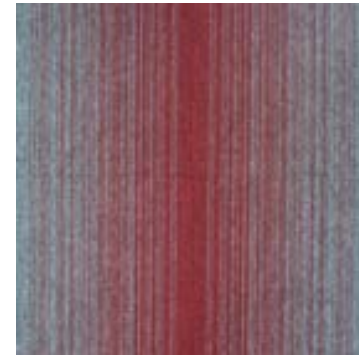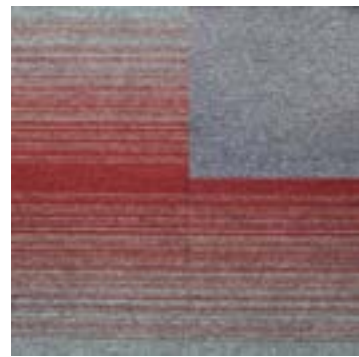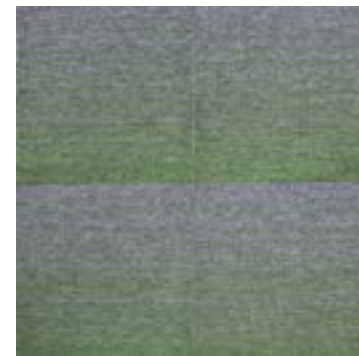

COBALT CREATIONS



COBALT CREATIONS

Technical details carpet tiles

	Herstellungsart	Mode fabrication	Productie methode	tufted 1/10"	
Construction	Struktur	Structure	Structuur	loop pile	
Pile composition	Polmaterial	Couche d'usure	Poolsamenstelling	100%PA 6	
Dye method	Farbgestaltung	Coloration	Kleurverwerking	solution dyed	
Primary backing	Trägermaterial	Premier dossier	Tuftdoek	polyester fleece	
Secondary backing	Rückenausrüstung	Dossier	Rug	GREENBASE modified bitumen	
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m² 550 (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m² 4300 (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm 3,0 (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm 6,0 (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m² 164000 (+/-)
Size	Abmessung	Dimension	Afmeting		cm 50 x 50
Packing	Verpackung	Emballage	Verpakking		20 per box 5 m²
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307	33 heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307	LC 2
Castor chair	Stuhlrolleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985	r =25 A(intensive)
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986	≤0,2%
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1	Bfl-S1 loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV ≤20
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω ≤10°
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m²/K/W 0,070
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w 0,15
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w 24 dB
				ISO 10140	ΔL 39 dB (1000 Hz)
Light fastness	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105B02	8
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijftechtheid	ISO 105X12	4-5 wet/dry
Water fastness	Wasserechtheit	Solidité à l'eau	Waterechtheid	ISO 105E01	5 colour/staining

CE
22
EN 14041
DOP 000423T-002



EN 1307
for use as floorcovering
in buildings (EN 14041)
according to the
manufacturer's specification

LARGO II



COMPOSICIÓN:
100% OLEFIN

CONTIENE POR CAJA:
- 20 PZAS. 0.50 X 0.50 m.
- 5 m² POR CAJA
- 20 onzas



46



82



91



155




194



320



390

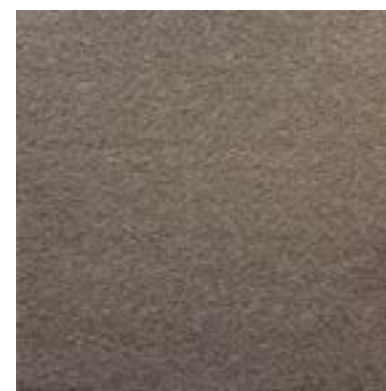

827



966

